


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm2^\circ$
- 3. 光洁度: 60-40
- 4. 中心波长: 808nm
- 5. 半带宽: 3.1 nm (typical);
5.7 nm (maximum)
- 6. 透过带: $T_{\text{abs}} > 90\%$ 808nm
- 7. 截止带1: $O_{\text{dabs}} > 5@625.9\text{--}799.9\text{nm}$
- 8. 截止带2: $O_{\text{dabs}} > 6@743.4\text{--}795.9\text{nm}$
- 9. 截止带3: $O_{\text{dabs}} > 6@820.1\text{--}888.8\text{nm}$
- 10. 截止带4: $O_{\text{dabs}} > 5@816.1\text{--}1139.4\text{nm}$
- 11. 激光损伤阈值: $0.1\text{J}/\text{cm}^2@532\text{nm}$ (10ns pulse width)

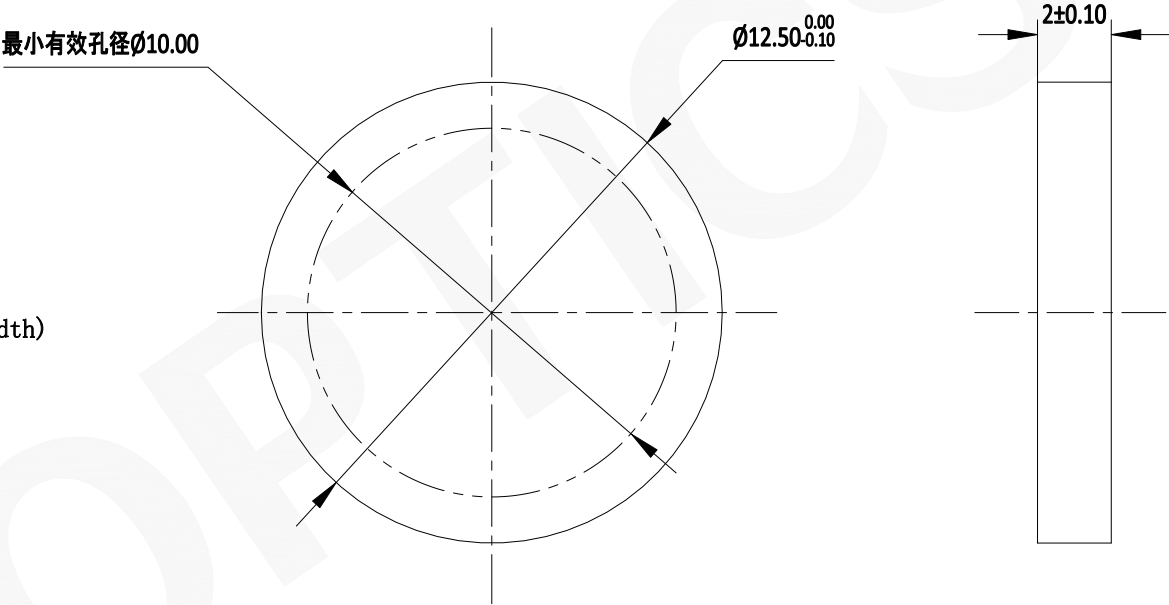

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

 GU OPTICS			
联合光科技(北京)有限公司			
名称	高性能窄带带通滤光片-未封装 D=12.50mm		
产品编号	199429	单位: mm	投影 